


TDS  
Technical Data Sheet


Release Date  
2025

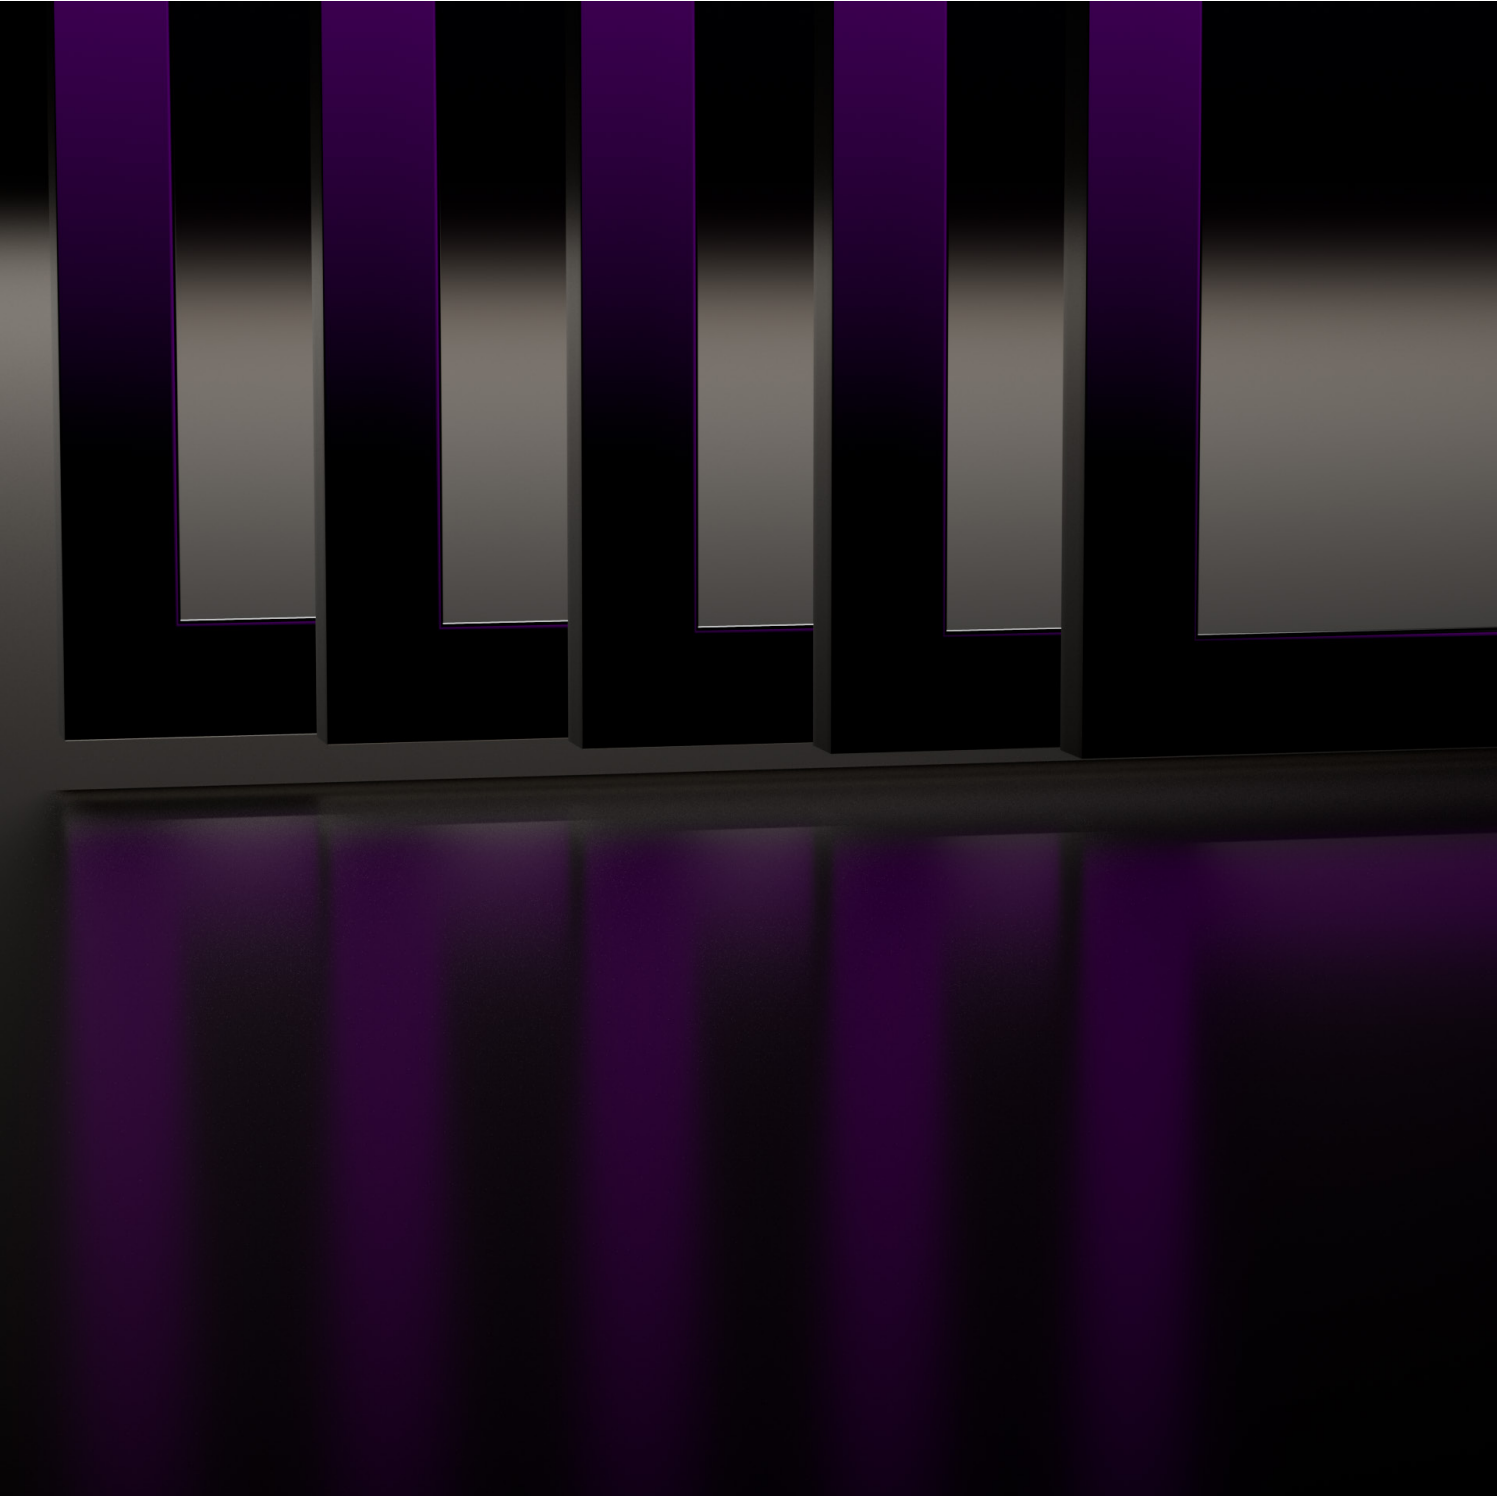

Conceived for the efficient reorganisation of differentiated functional areas, the sliding door system Supersincro is designed by UniFor for the agile conversion of contemporary work spaces.

The sliding door system Supersincro consists of a maximum of 5 glass or solid framed panels, with overlapping synchronised movement and a vertical folding opening.

MAIN FEATURES

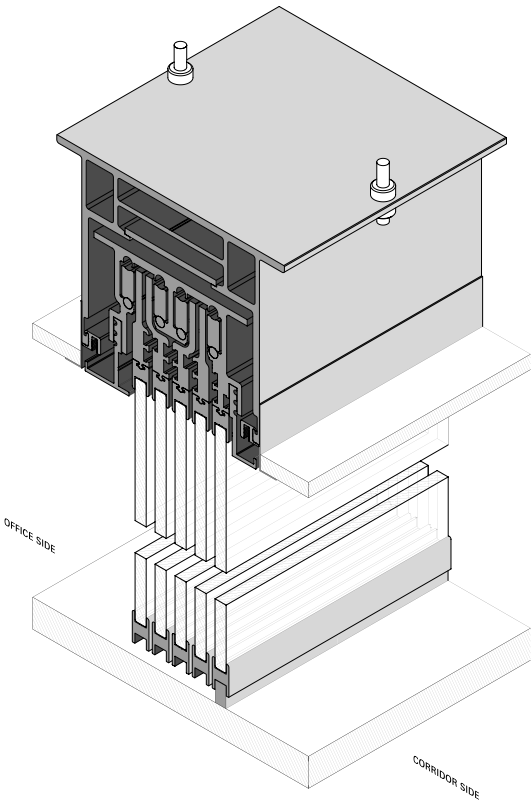

PROFILES

- Integrated upper profile h. 170 mm (67<sup>1</sup>/<sub>8</sub> in), mounted on structural beams
- Synchronised movement of visible glass panels with rollers
- Slow motion system, to ensure gradual, silent and slow door closure or opening
- The framed panels, glazed or solid, are hung only from the top profile, averting the need for invasive works on existing floor
- A metal connection element connects the sliding panels at the bottom
- The system consists of a single fixed glass module and a variable number of sliding elements, from a minimum of 2 to a maximum of 4 elements
- A series of requirements must be verified by means of compulsory technical-structural analysis, before Supersincro door installation.
- The Supersincro large sliding door is available in side opening and symmetrical central opening versions

GLASSES


- Safety glass panel:
- 10 mm (3<sup>1</sup>/<sub>8</sub> in)





HEIGHTS





- Maximum standard height: 3.000 mm (126 in)

ACCESSORIES

- The Supersincro sliding door system is completed by:
- Hide-away handle
  - Full height strip handle
  - Vertical handle in different standard heights  
h.254 mm (10 in), 508 mm (20 in), 762 mm (30 in), 1841 mm (72<sup>1</sup>/<sub>2</sub> in)
  - Door set con serratura

GLASS FINISH		<b>VC</b> Transparent glass		<b>CS</b> Frosted glass		Sample glass
		<b>CH</b> Extra-clear glass		<b>HS</b> Frosted extra-clear glass		

SOLID PARTITION FINISH		<b>AS</b> Sycamore		<b>RV</b> Natural Oak		Sample wood
		<b>NK</b> Straight-grained Canaletto Walnut		<b>5R</b> Thermo-treated Oak		

Laminate		<b>S4</b> White laminate		<b>GP</b> Platinum Grey laminate		Sample laminate
		<b>LS</b> Sycamore laminate		<b>RY</b> Oak laminate		

UniFor adopts management systems for quality, environment, and workplace health and safety, compliant with and certified according to UNI EN ISO 9001, UNI EN ISO 14001, and UNI ISO 45001 standards.

UniFor products are UL GREENGUARD Gold® certified, demonstrating compliance with chemical emissions standards and a commitment to protecting people and the environment, in line with the limits set by the UL GREENGUARD program.

Upon request, UniFor can provide products made with FSC® (FSC-C005654) certified materials. For more information, please contact UniFor at [unifor@unifor.it](mailto:unifor@unifor.it)."